

# G12R-66P

## N-type Bifacial Double Glass Module

HSM-BD66-GR635-665

**665W**

Maximum Power Output

**24.6%**

Maximum Efficiency



Higher energy density;  
lower operating temperature



Lower hotspot temperature;  
reduce risk of micro-cracks



Refined design,  
Busbar-free front side



Comprehensive supply chain integration,  
redefining BC standards




### Linear Performance Warranty



15 Years  
Product Warranty



30 Years Linear  
Performance Warranty

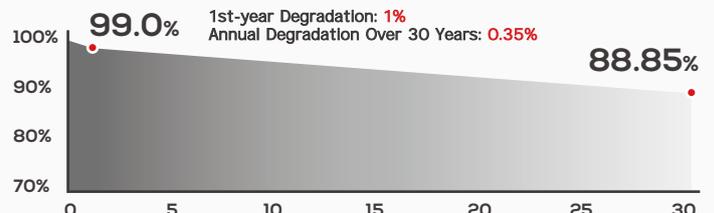

#### Comprehensive Products and System Certificates



IEC 61215 / IEC 61730 ISO 9001:2015 ISO 45001:2018 ISO 14001:2015

**Electrical Parameters (STC\* & BNPI\*)**

\* STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, AM1.5, Measuring Tolerance: ±3%  
\* BNPI: Front Irradiance 1000W/m<sup>2</sup>, Back Irradiance 135W/m<sup>2</sup>, Ambient Temperature 25°C, AM1.5, Measuring Tolerance: ±3%

Testing Condition		STC	BNPI										
Maximum Power	P <sub>max</sub> (W)	635	694	640	699	645	705	650	710	655	716	660	721
Open Circuit Voltage	V <sub>oc</sub> (V)	48.95	49.08	49.10	49.21	49.25	49.39	49.40	49.52	49.55	49.68	49.70	49.83
Short Circuit Current	I <sub>sc</sub> (A)	16.42	17.90	16.50	17.98	16.57	18.06	16.65	18.14	16.73	18.24	16.80	18.31
Maximum Power Voltage	V <sub>mp</sub> (V)	40.96	40.95	41.05	41.03	41.14	41.14	41.23	41.21	41.32	41.32	41.41	41.39
Maximum Power Current	I <sub>mp</sub> (A)	15.51	16.95	15.60	17.04	15.68	17.14	15.77	17.23	15.86	17.33	15.94	17.42
Module Efficiency	(%)	23.5		23.7		23.9		24.1		24.2		24.4	

**Electrical Characteristics with Different Bifacial Gain\***

\* The additional gain from the back side depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

Bifacial Gain		5%	10%	5%	10%	5%	10%	5%	10%	5%	10%	5%	10%
Maximum Power	P <sub>max</sub> (W)	667	699	672	704	677	710	683	715	688	721	693	732
Open Circuit Voltage	V <sub>oc</sub> (V)	48.95	48.95	49.10	49.10	49.25	49.25	49.40	49.40	49.55	49.55	49.70	49.70
Short Circuit Current	I <sub>sc</sub> (A)	17.24	18.06	17.33	18.15	17.40	18.23	17.48	18.32	17.57	18.40	17.64	18.48
Maximum Power Voltage	V <sub>mp</sub> (V)	40.96	40.96	41.05	41.05	41.14	41.14	41.23	41.23	41.32	41.32	41.41	41.41
Maximum Power Current	I <sub>mp</sub> (A)	16.29	17.06	16.38	17.16	16.46	17.25	16.56	17.35	16.65	17.45	16.74	17.53

**Temperature Coefficient**

Nominal Module Operating Temperature*	43 ± 2°C
Temperature Coefficient of I <sub>sc</sub>	+0.05%/°C
Temperature Coefficient of V <sub>oc</sub>	-0.22%/°C
Temperature Coefficient of P <sub>max</sub>	-0.26%/°C

**Operating Parameters**

Operating Temperature	-40~+70°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30A
Power Bifaciality	75 ± 5%
Safety Protection Rating	Class II
Fire Rating	Class C

**Mechanical Data**


\* Please refer to installation manual for details

No. of Cells	132pcs (6×22)
Dimension	2382×1134×30 mm
Weight	32.5kg ± 3%
Front Glass	2.0mm, Heat Strengthened, AR coating Glass
Back Glass	2.0mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
J-Box	IP68, three diodes
Cables	4.0mm <sup>2</sup> , +400mm, -200mm (can be customized)
Maximum Static Load	Front: 5400Pa/Back: 2400Pa*

**Packaging Configuration**

Modules per Pallet	36pcs
Modules per 40'HQ Container	720pcs
Pallets per 40'HQ Container	20pcs

**Curve Graph**

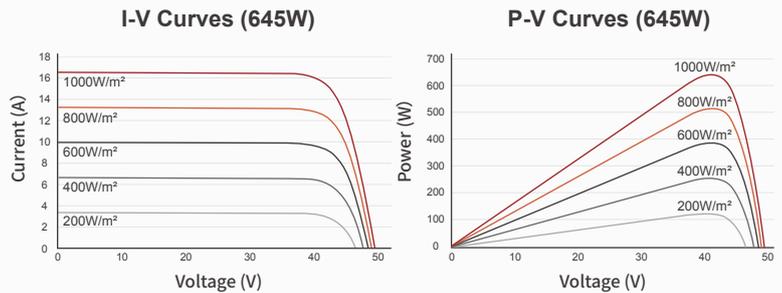

**Engineering Drawing**

[Unit: mm]

